

DBI650

# DOLPHIN MONOBLOC MIXER TAP

---

INSTALLATION AND MAINTENANCE GUIDE



August 2017

# DOLPHIN MONOBLOC MIXER TAP


## INSTALLATION AND MAINTENANCE GUIDE

### PRE INSTALLATION

- > Before installation, please ensure that the following work conditions are adhered to:
  - > Water temperature between 0° - 90°C
  - > Water pressure between 0.05MPa - 1.0MPa. A pressure reducing valve is necessary if pressure exceeds 1.2MPa
  - > Avoid major pressure differences between hot and cold water supply
- > Flush pipes thoroughly before and after installation to ensure water supply is free of any debris
- > Inspect tap fitting and debugged to its best. Do not attempt to disassemble fitting on your own
- > Use thread sealant tape (PRFE) on any screw joining connections and ensure all joints are tightened securely.

### INSTALLATION STEPS

1. An opening hole of 35mm diameter is required on sink top or work top (C) for tap installation.
2. Put the rubber O-ring (B) under the base of tap (A).
3. Screw the flexi-hoses (J) up to the base of tap (A).
4. Screw the fixing bolts (E) through the hex nut (D), then into the base of the tap properly
5. Insert the tap through the hole of sink top or work top (C) and position tap properly
6. Put the rubber C-washer (F) metal C-washer (G) and spring washer (H) over the fixing bolts (E) and up to the underside of the sink top or work top (D).
7. Screw and fasten the lock nuts (I) up to spring washer (H). Please ensure the lock nuts (I) are tightened securely.
8. Connect the flexi hoses (J) to the hot or cold water supply on the other end. Please ensure that the hot water supply goes through the hot flexi hose while the cold water supply goes through the cold flexi hose.

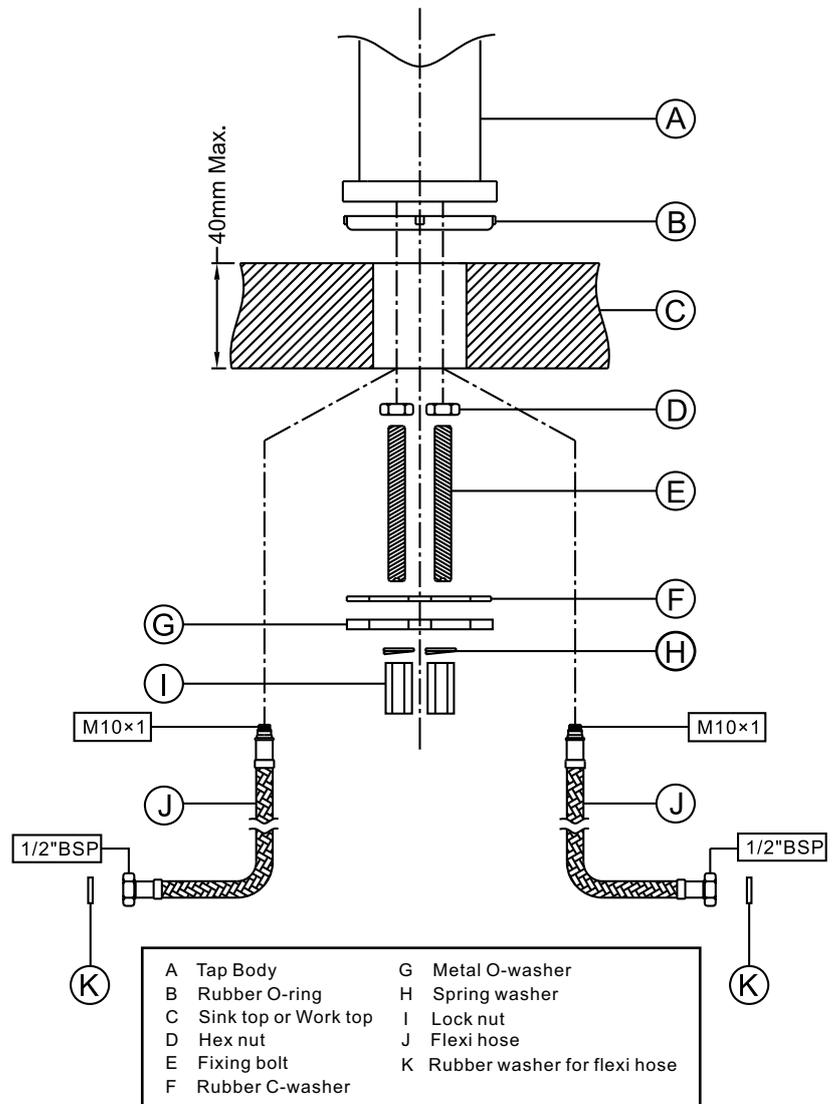

### WARRANTY

- > Lifetime warranty on anti-rust
- > 5 year warranty on tap cartridge
- > 10 year warranty of manufacturing defects

### CLEANING INSTRUCTIONS

- > Tap should not be cleaned with abrasive materials such as steel wool or scourers
- > Do not use any corrosive or abrasive cleaning agents containing acid or scouring agents

Dolphin Solutions Ltd  
Southpoint, Compass Park,  
Junction Road  
Bodiam, TN32 5BS,  
United Kingdom  
T +44 (0)1424 202 224  
info@dolphinsolutions.co.uk [dolphinsolutions.co.uk](http://dolphinsolutions.co.uk)

© Dolphin Solutions Ltd